


H.A.A.U.G.

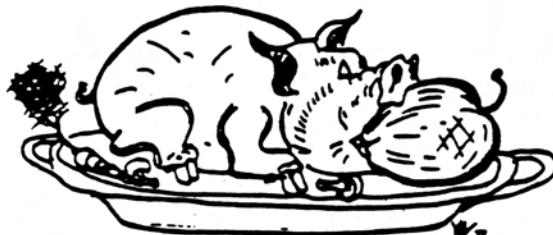

HOUSTON AREA APPLE USERS GROUP

THE APPLE BARREL

VOLUME 5 NO.2

MARCH 1982

PRESIDENT, MIKE KRAMER

VICE PRESIDENT, BRIAN WHALEY

EDITOR, MIKE KRAMER

*** CONTENTS ***

Page 1	Club Notes	
Page 2	Personalized Pascal	La Ray Geist
Page 17	Meeting Notice	
Page 18	The Tax Manager, a Review	Ruth Dill
Page 22	The HAAUG-Ham	Ed Seeger
Page 25	Game Contest Results	
Page 26	ANOVA, a Review	Nick Fotheringham
Page 28	Apple III News	Rudge Allen
Page 30	An Improved Boot Utility Program	Richard Parrish
Page 32	Disk Copying Problems	Richard Davis
Page 34	Print At	De Wayne Van Hoozer
Page 37	What Is It?	Anonymous

Houston Area Apple Users Group
APPLE BARREL
2218 Running Springs
Kingwood, TX 77339

CLUB NOTES

The HOUSTON AREA APPLE USERS GROUP is an Apple user club, not affiliated with Apple, Inc., or any retail computer store. HAAUG is a member of the International Apple Core and supports its publications and purposes. General membership meetings are held on the second Thursday of each month in the rear chapel of Memorial Lutheran Church, 5800 Westheimer, between Chimney Rock and Jungman Library, beginning at 6:30 P.M. An additional general meeting is held at 2:00 P.M. the last Saturday of each month at the University of Texas School of Public Health in the Medical Center at 6905 Bertner at Holcomb. This meeting features tutorials, problem-solving sessions, and access to the HAAUG software library. The meeting is held in the main floor meeting room to the left of the entrance. Bring your Apples!!

MEMBERSHIP INFORMATION

Dues are \$18 per 12-month period for regular memberships, \$6 for students through high school where no adult member of the family is an Apple user. Please make checks payable to Houston Area Apple Users Group and mail to Robin Cox, 5401 Chimney Rock #607, Houston, TX, 77081.

=====*

APPLE BARREL REPRINT POLICY

Unless otherwise noted within the program or article, any original material published herein may be reprinted without permission by any non-profit Apple club, group, or newsletter, provided proper credit is given to the Apple Barrel and the author

=====*

SPECIAL INTEREST GROUPS

Members who share common interest are encouraged to join or form Special Interest Groups to more fully explore their fields. These groups meet separately from the regular meetings at times convenient for the members. If you would like to become involved in a special interest group, either call the HOTLINE or contact one of the club officers. Lists of members with specific interests can be generated on request from the HAAUG MEMBERSHIP SURVEY data base.

OFFICERS / EXECUTIVE BOARD

President	Mike Kramer
Vice Pres	Brian Whaley
Treasurer	Wally Edmiston
Secretary	Ruth Dill
Software	Jim Good
Membership	Robin Cox

APPLE HOTLINE

713-668-8685

The APPLE HOTLINE has been established to provide an easy means to learn of meeting topics, news, etc. It can also be used to obtain answers to puzzling Apple - related questions. If you get a recording, leave your name, date, and time of day. You should get a return call within 24 hours.

SIG CHAIRMEN

Business	Rudge Allen
CP/M	Jim Huck
Sci/Engg	Mike Conway
FORTRAN	Lindsay Reed
Stocks	George Marsden
Education	Fred Yates
FORTH	Steve Knouse

Personalized Pascal

by La Ray Geist

Welcome to Personalized Pascal! In the coming issues we will be discussing topics that I hope will be of interest to intermediate and advanced Pascal programmers. These topics will be aimed at serious Pascal programmers interested in building a library of basic tools to make their programming more enjoyable. Some of these tools will be stand-alone programs and some will be Procedures and/or Functions which may be placed in Library Units for use in other programs.

This time we will build a stand-alone Program STARTUP which can be installed on the Root Diskette as *SYSTEM.STARTUP. The Apple Pascal System will automatically execute this program each time the System is Booted or re-initialized. STARTUP is a customized program which will "Prefix Volume #5" and initialize several items in systems which have optional 80 column displays and/or real time clocks. The program was designed for Apple Pascal Version 1.1 on a two drive system with a VIDEX Videoterm 80 column display board and a Mountain Hardware clock, however the idea is the same for other optional hardware and the program should be general enough to be adapted.

In order accomplish these initializations intimate knowledge of the Operating System including specific memory locations is required. The use of such information is only justified in programs which are designed to be executed on specific systems with identical hardware and system software configurations. I feel a SYSTEM.STARTUP program qualifies for this special treatment. This program will have to be rewritten each time the hardware configuration or system software is changed. STARTUP was designed to operate under Apple Pascal Version 1.1, with a VIDEX Videoterm in Slot #3, and Mountain Hardware clock in any slot. Programs which read and write specific blocks on disks and Poke numbers into specific memory locations are DANGEROUS so be careful. Remove this *SYSTEM.STARTUP from your boot diskette prior to trying out new hardware in Slot#3 or a new Version of system software. So much for the warnings - let's get down to business.

The purpose for STARTUP is to automatically take care of those housekeeping chores that are desired each time the system is Booted or re-initialized. On a two drive system it is often convenient to Prefix Volume #5 so that you don't have to type in the Volume Name (or #5) each time you are referring to a file on disk Drive #2. It is also convenient to have the System Date set by the a clock each time the system is booted. The System Date resides in the first part of the Directory of the Boot disk and is read into memory on each initialization. Therefore the System Date needs to be updated both places. The Videx Videoterm 80 column display board has a rather fast full block cursor as its default, but the cursor is programmable by Poking control codes into memory locations on the Videoterm board. The cursor blinking rate can be slowed to half of its normal hyper-active rate and converted to an underline among other options. STARTUP takes care of all of these chores and prints a 'personalized welcome' message as well.

The following simplified description of the STARTUP summarizes the program's actions.

Program STARTUP
Prefix Volume #5
Set Videx cursor (slow blinking underline)
Read in the date from the Boot Diskette
Check for Mountain Hardware clock (any slot)
If a Mountain Hardware clock is there
 Read the time and date
 Update the date on the boot disk
 Update the date in memory,
Welcome the Boot Volume to the Pascal system
 with a personalized message
 containing the current system date,
If a Mountain Hardware clock is available
 continously update the time on the screen
 until a key is pressed
Return to the Command level of the Pascal O/S.

The two Assembly Languages routines for the Mountain Hardware clock were given to the now extinct UCSD Pascal User's Group by David Ramsey of Magicke Software, Inc. These appear to be excellent routines for reading the Mountain Hardware clock. David Ramsey did an superb job of commenting. As you might expect these routines are significantly faster than the functionally equivalent Pascal routines which Mountain Hardware supplies to Pascal users of their clock. We should all thank David Ramsey for placing these fine routines in the public domain. These routines were copied from Vol5B:Ext/Clock.text with only one minor modification to the Function ClockSlot. As it was written it did not update the PUBLIC variable CS (for ClockSlot). I merely added two statements to the original code PUBLIC CS just after FUNC CLOCKSL0T and STA S just prior to the RETURN PASCAL. Point of Interest - these routines are available assembled and installed in a Libray Unit in Vol5B:ClockStuff. The Assembly Language Function KeyPress was published in Apple Orchard Winter '80-81. The article was in the Contact section with no author listed. The KeyPress Function is a very general one. It is applicable to Apple Pascal Version 1.0 and 1.1 and is usable for Apples with or without a remote terminal. Most of the 80 column display cards available for the Apple look like a remote terminal to the Apple Pascal Operating System and the normal KeyPress function included in the Library Unit AppleStuff will not function with them (without patches to System.Apple). This EXTERNAL FUNCTION may be L(inked into any program needing the KeyPress Function by inserting the line "Function KeyPress : Boolean; External;" just below the VARiables section of the program heading block. After compiling the Pascal text file, the KeyPress code file must be L(inked as described below. (If Segment Procedures are used in the program this 'external function declaration' may be placed just after the Segment Procedures.)

Instructions

You will be exercising almost all of the Apple Pascal Language System to complete this project. You'll use the E(ditor to build both a Pascal program and the Assembly Language Procedures and Functions. The Pascal program will be C(ompiled and the Assembly Language routines will be A(ssembled into code files. The assembled code will be L(inked to the Pascal code. Finally the resultant code file will be Transferred to the boot diskette with the F(iler.

I find it useful to use "Work Disks" which have the files required for Compiling, Assembling and Linking new programs. The following instructions assume that the "System Disk" in Volume#4 (Drive 1) contains SYSTEM.APPLE, SYSTEM.PASCAL, SYSTEM.EDITOR, SYSTEM.FILER, SYSTEM.LIBRARY, SYSTEM.MISCINFO, SYSTEM.SYNTAX, and SYSTEM.CHARSET and the "Work Disk" in Volume#5 (Drive 2) contains SYSTEM.COMPLILER, SYSTEM.ASSMBLER, SYSTEM.LINKER, 6500.OPCODES, and 6500.ERRORS. The file names listed in these instructions are suggested but not required, however the final file *SYSTEM.STARTUP must have this name and reside on the boot diskette so that the system can find and use it.

From the Command level select
F(iler and
Prefix #5
Q(uit the filer.

E(dit the StartUp Pascal text
W(rite or S(ave it as :STARTUP.TEXT
C(ompile the Pascal text into :STARTUP.CODE

E(dit the ExtClock Assembler text
W(rite or S(ave it as :EXTCLOCK.TEXT
A(ssemble EXTCLOCK into :EXTCLOCK.CODE

E(dit the KeyPress Assembler text
W(rite or S(ave it as :KEYPRESS.TEXT
A(ssemble KEYPRESS into :KEYPRESS.CODE

L(ink the Pascal host :STARTUP.CODE
with the library :EXTCLOCK.CODE and
with the library :KEYPRESS.CODE
into :SYS.STARTUP.CODE

Select the
F(iler and
T(ransfer :SYS.STARTUP.CODE,*SYSTEM.STARTUP.

I hope you enjoy the automatic features of STARTUP as much as I do. In coming issues we will build a System.Library which contains routines to simplify user-to-Pascal communications within a Pascal program.

SNAVE SYSTEMS



GAMES, Etc.

	RETAIL PRICE	OUR PRICE
ABM	24.95	19.95
Ameba Man	34.95	25.95
Apple-oids	29.95	22.95
Apple Panic	29.95	21.95
Audex	29.95	21.95
Autobahn	29.95	22.95
Beer Run	34.95	27.45
Bug Attack	29.95	21.95
Castle Wolfenstein	29.95	21.95
Ceiling Zero	29.95	21.95
Computer Foosball	29.95	21.95
Cops & Robbers	34.95	27.45
County Fair	29.95	21.95
Cranston Manor	34.95	27.50
Crossfire	29.95	21.95
Cyborg	32.95	24.95
Dark Forest	29.95	22.95
David's Midnight Magic	34.95	26.95
Draw Poker	29.95	21.95
Eliminator	24.95	19.95
Epoch	34.95	25.95
E-Z Draw 3.3	49.95	38.95
Falcons	29.95	21.95
Firebird	29.95	21.95
Genetic Drift	29.95	22.95
Hadron	34.95	24.40
Hi-Res Computer Golf	29.95	22.95
Hi-Res Cribbage	24.95	19.95
Hi-Res Football	39.95	27.95
Hi-Res Soccer	29.95	20.95
Hi-Res Secrets	125.00	89.95
Horizon Five	34.95	26.95
Jawbreaker	29.95	20.95
Mission Asteroid	19.95	15.20
Missle Defense	29.95	20.95
Mystery House	24.95	19.95
Olympic Decathlon	29.95	21.95
Oo-Topos	32.95	24.95
Outpost	29.95	23.95
Painter Power	39.95	29.95
Pascal Graphics Editor	99.95	71.95
Pegasus II	29.95	22.95
Peeping Tom	34.95	26.95
Photar	29.95	21.95
Pool 1.5	34.95	25.95
Race For Midnight	29.95	23.95
Raster Blaster	29.95	21.95
Roach Hotel	34.95	26.95
Roadwork	39.95	27.95
Robot War	39.95	30.95
Russki Duck	34.95	24.95
Sabotage	24.95	19.95
Shuffleboard	29.95	21.95
Snack Attack	29.95	21.95
Snake Byte	29.95	21.95
Sneakers	29.95	20.95
Softport	29.95	21.95
Space Eggs	29.95	22.45
Star Blazer	31.95	23.95
Star Thief	29.95	21.95
Suicide	29.95	21.95
Super Disk Copy III	30.00	24.95
Tasc Compiler	175.00	129.95
The Asteroid Field	24.95	19.95
The Expediter II	99.95	71.95
The Gauntlet	34.95	25.95
Thief	29.95	21.95
Three Mile Island	39.95	30.95
Track Attack	29.95	22.95
Twerps	29.95	21.95
Ultima	39.95	29.95

READ
THIS!

SNAVE SYSTEMS has the newest software at up to 40% off the retail price. Just compare prices and you'll see SNAVE SYSTEMS is the only real choice.

We have a large selection of software.

Send for FREE catalog

FREE DISKS (Limited time only.)

With every \$50 of purchase you receive a free disk.

Example:

\$150.00 order receives 3

free disks.

If you don't see it,
just ask us!

SPECIALS

	RETAIL PRICE	OUR PRICE
Borg	29.95	19.95
Gorgon	WOW	39.95
Marauder	34.95	23.95
Mouskattack	WOW	39.95
Superscribe II	WOW	129.95
TG Paddles (accs)	39.95	29.95
Threshold	39.95	28.95
Time Zone	99.95	69.95
Trick Shot	39.95	27.95
Word Scrambler and Super Speller	WOW	19.95
		14.95

ALL PROGRAMS ON DISK

Money Orders • Certified Checks • Personal Checks

Allow 2 weeks for delivery • Add \$2.00 for postage (\$3.00 UPS Blue Label), foreign extra • Illinois residents add 6% sales tax.

Prices subject to change without notice.

Apple is a registered trademark of Apple Computer, Inc.

Games (cont'd.)

	RETAIL PRICE	OUR PRICE
Ulysses	34.95	25.95
Warp Destroyer	29.95	21.95
Wizard and the Princess	32.95	23.95
Wizardry	49.95	36.95
Zero Gravity	29.95	22.50
Zoom Grafix	39.95	31.95

BUSINESS

	RETAIL PRICE	OUR PRICE
Address Book	49.95	39.95
Complete Mailing	59.95	49.95
Cont. General Ledger	250.00	197.95
Cont. Accounts Rec.	250.00	197.95
Cont. Accounts Pay.	250.00	197.95
Continental Payroll	250.00	197.95
Cont. Property Mgt.	250.00	197.95
DB Master	229.00	179.95
DB Master Utility Pak 1	99.00	72.95
DB Master Utility Pak 2	99.00	72.95
Desktop Plan II	200.00	156.95
Desktop Plan III	300.00	239.95
Form Letter	100.00	79.95
General Ledger (Broderbund)	495.00	389.95
Magic Window	99.95	71.95
Payroll (Broderbund)	395.00	297.95
Personal Filing System	95.00	71.50
PFS: Report	95.00	71.50
Professional EasyWriter	250.00	197.95
Super Text II	150.00	117.95
Tax Preparer (1982)	150.00	117.95
The Apple Speller	75.00	64.95
The Data Factory	150.00	117.95
The Dictionary	99.95	71.95
The General Manager	99.95	71.95
The Home Accountant	74.95	59.95
The Invoice Factory	200.00	145.95
The Mailroom	34.95	27.95
Visicalc 3.3	200.00	145.95
Visidex	200.00	145.95
Visifile	250.00	197.95
Visipac	710.00	589.95
Visiplot	180.00	147.95
Visiterm	150.00	119.95
Visitrend/Visiplot	260.00	209.95

EDUCATION

	RETAIL PRICE	OUR PRICE
Algebra I	39.95	31.95
Compu-Read	29.95	23.95
Crossword Magic	49.95	38.95
English SAT #1	30.00	24.95
Here's Hollywood	24.95	18.95
Lisa Educational Pkg.	119.95	89.95
Master Type	39.95	29.95
Meet the Presidents	39.95	29.95
Pascal Tutor	125.00	97.95
The Learning System	150.00	139.95
The Star Gazer's Guide	30.00	24.95
Typing Tutor	24.95	19.95
U.S. Constitution Tutor	30.00	24.95
Zenith Education System	250.00	197.95

MISCELLANEOUS

	RETAIL PRICE	OUR PRICE
Select-A-Port (accs)	59.95	45.95
TG Joystick (accs)	59.95	45.95
Joypot (accs)	74.95	59.95
Memorex Disks (box of 10)	29.95	

SNAVE SYSTEMS

Dept. D

Post Office Box 48957
Niles, Illinois 60648

```

Program Startup;

{ Personalized *SYSTEM.STARTUP program which will:
1. Set the PREFIX to #5,
2. Set the cursor of a VIDEY 80 Column display to an slow blinking underline,
3. Check for a Mountain Hardware Clock and
   a. Update the system date on the BOOT DISK and in MEMORY,
   b. Write the current time to the screen until a key is pressed,
4. Write a personalized welcome to the system on the screen. }

Const firstbyte = 20; { Used by GetOldDate and PutNewDate }
secondbyte = 21; { Used by GetOldDate and PutNewDate }
register = 10; { Used by SetVidex }
nocursor = 50; { Used by SetVidex }
underline = 104; { Used by SetVidex }
videxaddr = -16208; { Used by SetVidex }
lowdate = -21992; { Used by PutNewDate }
prefix = -22008; { Used by SetPrefix }

Type Pa = Packed Array[0..1] of 0..255;
Magic = Record
  Case Boolean of
    true : (int : Integer);
    false : (ptr : ^pa)
  end;
Daterec = Packed Record
  month : 0..12;
  day : 0..31;
  year : 0..100
end;

Var cs,
high,
low,
month,
day,
hour,
minute,
second,
millisecond : Integer;
today,
lastbootday : Daterec;
name : String[10];
buffer : Packed Array [0..511] of 0..255;
MHclock : Boolean;
cheat : Magic;

Procedure TimeStamp; External;
Function ClockSlot : Integer; External;
Function KeyPress : Boolean; External;

```

```

Function Peek      ( addr      : Integer ) : Integer;
Begin { Peek }
  cheat.int      := addr;
  Peek           := cheat.ptr^[0]
end;  { Peek }

Procedure Poke     ( addr,data : Integer );
Begin { Poke }
  data           := Abs(data Mod 256);
  cheat.int      := addr;
  cheat.ptr^[0]   := data
end;  { Poke }

Procedure CheckForClock;
Begin { CheckForClock }
  If ClockSlot < 8 then MHclock := True
  else MHclock := False
end;  { CheckForClock }

Procedure SetVidex (code : Integer);
Var      secndaddr : Integer;

Begin { SetVidex }
  secndaddr := videxaddr + 1;
  Poke (videxaddr,register);
  Poke (secndaddr,code)
end;  { SetVidex }

Procedure GetOldDate ( Var olddate : Daterec );
Var      i          : Integer;
        ch         : String[1];

Begin { GetOldDate }
  Unitread ( 4, buffer,512, 2);      { Read the first block of the Directory }
  high := ( buffer [ secondbyte ] ); { Get the date bytes into high and low }
  low  := ( buffer [ firstbyte ] );
  With olddate do                  { Unpack the Date }
    Begin
      day   := ( high MOD 2 ) * 16 + low DIV 16;
      month := low MOD 16;
      year  := high DIV 2
    end;
  { Extract the Volume name }
  ch := ' ';
  name := '';
  For i := 1 to buffer[6] do
    Begin
      ch[1] := Chr(buffer[i + 6]);
      name := Concat (name,ch)
    end;
  name := Concat (name,':')
end; { GetOldDate }

```

```

Procedure PutNewDate [ newdate : Daterec ];

Begin { PutNewDate }
  With newdate do           { Pack the date into two bytes. }
    Begin
      high := (year * 2) + (day DIV 16);
      low := month + (day MOD 16)*16
    end;
    buffer [firstbyte] := (low); { Load the buffer with the date bytes. }
    buffer [secondbyte] := (high);
    Unitwrite[ 4, buffer,512, 2,12];{ Write the buffer back out to the disk. }
    Poke (lowdate ,low);          { Update the date in memory. }
    Poke (lowdate+1,high)
  end; { PutNewDate }

Procedure WriteDate (Date: DateRec);
Begin { WriteDate }
  with Date do
    Begin
      Write(day:2, ', ');
      Case month of
        1: Write('Jan.');
        2: Write('Feb.');
        3: Write('Mar.');
        4: Write('Apr.');
        5: Write('May ');
        6: Write('Jun.');
        7: Write('Jul.');
        8: Write('Aug.');
        9: Write('Sep.');
        10: Write('Oct.');
        11: Write('Nov.');
        12: Write('Dec.');
      end {Case};
      Write(' 19',year:2);
    end {with};
  end; { WriteDate }

Procedure SetPrefix;

Begin { SetPrefix }
  Poke (prefix,2);           { Set the "Prefix" to "#5". }
  Poke (prefix+1,Ord['#']);
  Poke (prefix+2,Ord['5'])
end; { SetPrefix }

```

```

Begin {StartUp}
  SetPrefix;           { Set the "prefix to #5". }
  SetVidex {underline}; { Change the cursor to an underline. }
  GetOldDate {lastbootday}; { Get the date from the boot disk directory. }
  Page {output};
  CheckForClock;       { Check for a Mountain Hardware clock. }
{ If a clock is available update the date on the disk and in memory. }
  If MHclock then
    Begin
      Timestamp;       { Get the current date and time. }
      If {day <> lastbootday.day} or {month <> lastbootday.month} then
        Begin
          GotoXY {0,2};
          Write ['Volume ',name,', was last booted on '];
          Writedate {lastbootday};
          If {month <= 6} and {lastbootday.month > 6}
            then lastbootday.year := lastbootday.year + 1;
          today.year := lastbootday.year;
          today.month:= month;
          today.day  := day;
          Putnewdate {today}
        end
      end;
{ Welcome the boot disk volume to the System. }
  GotoXY {0,10};
  Writeln('Your Message Goes Here           ');
  Writeln('welcomes ', name, ' to Apple Pascal [Version 1.1]'); Writeln;
  If MHclock then
    Begin
      Timestamp;
      Write['at ',hour:2,':',minute:2,':',second:2,' on '];
      today.year := lastbootday.year;
      today.month:= month;
      today.day  := day;
      Writedate {today};
      GotoXY { 0,23}; Write ['Press <Space Bar> to clear the screen.'];
      GotoXY { 0,0};
      Write
      ['Command: E{dit, R{un, F{ile, C{omp, L{ink, X{ecute, A{ssem, D{ebug,? [1.1]}];
      { Turn off the cursor while updating the time to the screen. }
      SetVidex {nocursor};
      { Keep writing the time to the screen until a key is pressed. }
      Repeat
        GotoXY {3,14}; Timestamp; Write {hour:2,':',minute:2,':',second:2}
        until KeyPress;
      { Turn the cursor back on as an underline. }
      SetVidex {underline}
    end
  else
    Begin
      Write ['The current date is '];
      Writedate {lastbootday};
      GotoXY { 0,23}; Write ['Press <Space Bar> to clear the screen.']
    end
  end. {StartUp}

```

```

.FUNC KEYPRESS,0           ; 0 WORDS OF PARAMETERS PASSED
;*****
;*
;*   FUNCTION KEYPRESS : BOOLEAN; EXTERNAL
;*
;*   Apple Orchard Winter 1980-81,
;*   Contact section, Page 65,
;*   Author Unknown
;*
;*****
;*
RETURN .EQU 0                 ; STORAGE FOR RETURN ADDRESS
CONCKVEC.EQU 0BF0A            ; FIXED ADDRESS IN BIOS
RPTR    .EQU 0BF18            ; FIXED BUFFER POINTER
WPTR    .EQU 0BF19            ; FIXED BUFFER POINTER
VERSION .EQU 0BF21            ; SYSTEM VERSION NUMBER
KEYBOARD.EQU 0C000            ; KEYBOARD HARDWARE
CONCK   .EQU OFF5C            ; WAY TO GET CONCK IN OLD SYSTEM

    PLA
    STA RETURN
    PLA
    STA RETURN+1
    PLA
    PLA
    PLA
    PLA           ; POP 4 BYTES STACK BIAS FOR FUNCTION
    LDA #0
    PHA           ; RETURN MSB ZERO
    LDA KEYBOARD
    BMI TRUE
    LDA VERSION
    BNE $1           ; JUMP IF NOT ORIGINAL PASCAL VERSION
    JSR CONCK
    JMP $2

$1    JSR CONCKVEC           ; CHECK CONSOLE
$2    LDA RPTR
    CMP WPTR           ; CHAR IN BUFFER?
    BEQ EMPTY
    TRUE   LDA #1           ; YES, RETURN KEYPRESS = TRUE
    BNE KPDONE          ; ALWAYS TAKEN
    EMPTY  LDA #0           ; NO, RETURN KEYPRESS = FALSE
    KPDONE PHA           ; PUSH LSB RESULT
    LDA RETURN+1
    PHA           ; RESTORE
    LDA RETURN
    PHA
    RTS

; Note the use of the Local Labels $1 and $2 explained by R Haines in the
; same issue of Apple Orchard (see above) on page 35.
; "They provide an easy way to address locations that are a short
; distance away from the instruction. In addition they may be multiply
; defined, with only the most recent definition being usable. ...
; Because they may be redefined, local labels can be used in macros..."'
; Only 21 local labels may be used at any one time.

.END

```

B.I.S GENERAL.LEDGER.ON.LINE

FAST EASY FLEXIBLE

B.I.S is more than just a GENERAL LEDGER. It's a BUSINESS INFORMATION SYSTEM which can provide you with SELECTED information WHEN you need it.

Information is IMMEDIATELY available to assist you in making management decisions. Wouldn't you like to know your SALES for this YEAR, MONTH, WEEK OR DAY. Or how about having a CASH REPORT on all of your bank accounts whenever you want it.

B.I.S will change the way you do business. Now you can immediately analyze, consolidate and report the details of your business. B.I.S retains every entry forever, and there is virtually no limit to the number of entries you are allowed.

B.I.S IS FAST

The machine language speed of B.I.S will save you time. You can see for yourself how each entry changes the general ledger account balances.

POSTING IS INSTANTANEOUS. 40 split entries can be completely posted in less than 20 seconds. REPORTING IS IMMEDIATE. If your wish, within another 20 seconds, your BALANCE SHEET, can begin printing reflecting those entries.

With B.I.S, in less than 2 minutes, you could: ADD an account, ENTER a 10 item sale, CHANGE an account description, ENTER a wire transfer, DELETE an account, ENTER a payroll check, plus SCROLL over 100 new account balances and then turn the computer off if you wish. Within the next 4 minutes a complete BALANCE SHEET or PROFIT & LOSS reflecting these entries could be printed and reviewed.

B.I.S IS EASY TO USE

The menus are simple and easy to use. Prompts will guide you along the way. The monitor is SCREEN-CODED with a code which refers you to the proper place in the reference manual.

B.I.S is so simple that you could think of it as a SPIRAL NOTEBOOK. And if you can write on a page in a spiral notebook, then you can make entries into B.I.S.

B.I.S comes with ACCOUNTS & JOURNALS already set up. And our HAND-HOLDING TUTORIAL MANUAL will describe your every single keypress needed to get you going.

B.I.S IS FLEXIBLE

You may change B.I.S into any system you want, WHENEVER you want. B.I.S can handle ANY BUSINESS ACTIVITY. You are allowed to define your own business activity codes.

You have full control over financial reporting with separate CUSTOM REPORT GENERATORS. B.I.S allows you complete freedom in defining your ACCOUNT RANGES and reporting descriptions.

You may define your own JOURNAL NAMES and create your own journals complete with account prompts.

One B.I.S general ledger can handle 3, COMPLETELY SEPARATE, sets of books with CONSOLIDATING capabilities. You can even use B.I.S to do your subsidiary accounts receivable and payable ledgers. It is truly a GENERAL LEDGER and can be used for any business purpose.

B.I.S \$295 is AVAILABLE from your local APPLE* DEALER or you can call BRODERICK & ASSOCIATES: 8635 SHAGROCK:DALLAS, TEXAS: (214) 341-1635

```

.TITLE "EXT/CLOCK - 14 May 1980 / 17:30"
;
;Mountain Hardware Apple Clock
;Pascal Linkage routines
;1/80 by Magicke Software, Inc.
;David Ramsey
;
;
;TIMESTAMP procedure
;
;Uses public variable CS. CS may be declared and assigned in the calling program
;or found with the separate function CLOCKSLOT. If CS = 8, the CLOCKSLOT
;function didn't find a clock, and the routine aborts without modifying anything.
;
;
;CLOCKSLOT function
;
;Finds clock....slot returned is used by TIMESTAMP...checks first three bytes
;of ROM code on clock card, SHOULD be able to find all MH revisions...
;
;
;
;Zero page usage:00- Return address low byte
;                  01- Return address high byte
;JUMP             02- JMP opcode
;                  03- Clock address low byte
;                  04- Clock address high byte
;PARAM            05- Time parameter address low byte
;PARAM+1          06- Time parameter address high byte
;TEMP              07- Temporary storage used by GET
;TEMP+1            08- See above

```

.MACRO POP

PLA

STA %1

PLA

STA %1+1

.ENDM

.MACRO FPOP

POP %1

PLA

PLA

PLA

.ENDM

.MACRO PUSH

LDA %1+1

PHA

LDA %1

PHA

.ENDM

```

.MACRO RETURN
PUSH %1
RTS
.ENDM

.MACRO GET
LDA #0
STA %2+1
LDA %1
STA TEMP
LDA %1+1
STA TEMP+1
ASL A
ASL A
ASL A
CLC
ADC TEMP+1
ADC TEMP+1
ADC TEMP
SEC
SBC #91
STA %2
.ENDM

.MACRO CHECK
LDA %1
SEC
SBC #28
BPL $2
BMI $3
$2 LDA %1
SEC
SBC #1
STA %1
$3
.ENDM

.NOPATCHLIST

PASCAL .EQU 0 ;Pascal return address storage area

.FUNC CLOCKSLOT

.PUBLIC CS ; Mod L Geist

```

```

FPOP PASCAL
LDA #0
STA 03
LDA #0C2 ;Initial slot
STA 04 ;We'll start looking in slot #2 and proceed
;to slot 7. It can't be in some of the slots
;but it's easier to scan everything than to
;handle special cases, right?
LOOP0 LDY #00 ;Index
LDA (03),Y ;Get byte
CMP #08 ;Check for first value
BEQ SECON ;It matches...check for second
NOPE INC 04 ;Didn't match...increment base 'register'
LDA 04 ;Load slot #
CMP #0C8 ;Finished checking for clock?
BNE LOOP0 ;Nope, loop back
JMP THRU ;(sigh)
SECON INY ;Increment counter for second byte
LDA (03),Y
CMP #078
BEQ THIRD ;Second byte matches...this may be it!
JMP NOPE ;Didn't match...try again...
THIRD INY ;We've made it this far!
LDA (03),Y ;Load...
CMP #02C ;Compare...
BEQ THRU ;Found it!!!
JMP NOPE ;So close! Damn the fates!
THRU LDA #0
PHA
LDA 04
SEC
SBC #0C0
PHA
STA CS ; Mod L Geist
RETURN PASCAL
;
;

```

.PROC TIMESTAMP

;Note that a JMP CX00 RTS has been set up at location \$02. This is for
;an 'indirect JMP' trick. The clock routine will be called by a JSR 02
;command when needed....

;
;Note: If the ClockStuff unit is used, the variables appearing in the
; .PUBLIC declaration must NOT be declared in the program, lest the
;compiler report an 'identifier declared twice' error. However, if these
;routines are L)inked in manually, the variables MUST be declared. They are
;of type INTEGER.
;

```

.PUBLIC MONTH, DAY, HOUR, MINUTE, SECOND, MILLISECOND, CS

PARAM .EQU 5
TEMP .EQU 8
BASE .EQU 0A
SAVE .EQU 0C      ;8 BYTE RESERVED AREA
CSW .EQU 036
KSW .EQU 038

POP PASCAL
LDA CS      ;Get CLOCKSLOT
CMP #08
BNE CONT
JMP BYE
CONT CLC
ADC #0C0      ;Add offset
STA 04
LDA #0
STA 03
LDA #4C      ;JMP opcode
STA 2
LDA #0C0
STA PARAM+1
LDA 04
AND #0F      ;Zero upper 4 bits
ASL A
ASL A
ASL A
ASL A      ;Move lower nybble to upper nybble
CLC
ADC #87
STA PARAM
PUSH CSW
PUSH KSW
LDX #0
LDA [PARAM,X] ;Next four instructions are 'arcane things'
CLI      ;[interrupt parameters, etc.] necessary for
LDA 04      ;the clock to be read
STA 039
;
;HERE WE GO...
;
STASHEM JSR INITPTR
$0 LDA [BASE,X]
STA SAVE,Y
JSR INCPTR
DEY
BPL $0
;
;NOW ITS ALL SAFE & SOUND!
;
JSR 02      ;This gets the time
;
;RESTORE IT ALL...
;

```

```

RESTORE JSR INITPTR
$0    LDA SAVE,Y
      STA [BASE,X]
      JSR INCPTR
      DEY
      BPL $0
;
;I HOPE THAT WORKED!
;
GET 0286,SECOND
CHECK SECOND
GET 0289,MINUTE
CHECK MINUTE
GET 028C,HOUR
GET 028F,DAY
GET 0292,MONTH

LDA #0      ;Now for the fun part- milliseconds!
STA TEMP+1
LDA 284
SEC
SBC #0B0
STA TEMP  ;TEMP now set
ASL A      ;Must multiply by 100, which we accomplish by
ASL A      ;multiplying by ten TWICE.
ASL A      ;Three shift lefts multiply by eight-
CLC
ADC TEMP
ADC TEMP  ;...and two adds make ten
STA TEMP  ;Store hundreds of MSECS times ten
STA PARAM
LDX #3
LOOP   ASL TEMP ;Now we do it again
      ROL TEMP+1
      DEX
      BNE LOOP ;Finish three ASLs
      LDX #2
LOOP2  CLC
      LDA TEMP
      ADC PARAM
      STA TEMP
      LDA TEMP+1
      ADC #0      ;Adding an 8 bit value to a 16 bit word...
      STA TEMP+1
      DEX
      BNE LOOP2
      LDA 283  ;Get tens of msecs
      SEC
      SBC #0B0
      STA 283
      ASL A
      ASL A
      ASL A      ;Look familiar?
      CLC
      ADC 283

```

```
ADC 283
STA 283
LDA 282
SEC
SBC #080
CLC
ADC 283
ADC TEMP
STA MILLISECONDS
BCC FINI
INC TEMP+1
FINI POP KSW
POP CSW
LDA TEMP+1
STA MILLISECONDS+1
BYE RETURN PASCAL ;Finished!

INITPTR LDA #0F8
STA BASE
LDA #07
STA BASE+1
LDY #7
LDX #0
RTS

INCPTR LDA BASE
SEC
SBC #080
STA BASE
BCS INCRTN
INC BASE+1
INCRTN RTS

.END
```

HAAUG:EXTCLOCK.TEXT

MEETING NOTICE

On Saturday, March 27, Lee Gilbreth will discuss the evolution and use of File Cabinet, the popular public domain data base program. The presentation will begin at approximately 3:00 P.M.

THE TAX MANAGER by TASO from Micro Lab
A Review by Ruth Dill

It's tax time again, and one of the best uses we can make of our Apples is putting them to work on our taxes.

THE TAX MANAGER on the whole is relatively easy to use and performs its functions efficiently. It provides a Tax Guide which allows the user to answer pertinent questions after completion of which the tax forms and schedules he will need are listed.

A Tax Checklist can be used to enable you to take full advantage of the deductions you are entitled to. The menu lists:

1. Taxable Income Items
2. Items Not Taxable
3. Business or Professional Deductions
4. Farm Deductions
5. Deductions Toward Adjusted Gross Income
6. Investment Tax Credit
7. Energy Tax Credit Items
8. Itemized Deductions
9. Non-deductible Items
10. Review an Entire Category
99. Return to Tax-Manager Menu

Through option 10, you can review an entire category, or, if you know what item you are looking for you can do a keyword search.

From the Tax-Manager Menu, you may list the forms you will need in sequence and will then be able to go from one form to another without returning to the menu or you may select each form individually from the menu. Data is entered onto the form. If the form or schedule is too large to be shown on the Apple screen at one time, it is divided into "pages" which are shown in sequence. You may go forward to the next page or back up to the last page by utilizing command keys listed in the control panel.

Tax Manager automatically recalculates amounts each time you enter data, for the page you are viewing as well as for all other items on that page affected by the new data. The recalculation also links the correct amounts from schedule to schedule/form to form. You do not have to go through each

Memory Expansion for Apple®

Computer Data Services proudly announces
new Saturn products for your Apple II.

128K RAM

ALL FOR ONLY
\$599

(\$3 shipping, US)

Our newest product. Fully compatible with Saturn's 32K RAM board, 16K RAM cards and language card.

Includes 5 comprehensive software packages:

1. MOVEDOS (relocate DOS)
2. RAMEXPAND (for Applesoft®, Integer)
3. PSEUDO-DISK for DOS 3.3 or 3.2
4. PSEUDO-DISK for CP/M®
5. PSEUDO-DISK for PASCAL

64K RAM **\$425**

A medium range memory expansion board which can be upgraded to 128K at a later date. (Upgrade kit sold for \$175). Includes all 5 software packages offered with the 128K board.

(\$3 shipping, US)

32K RAM STILL ONLY **\$239**

The old favorite for Apple users. Includes the first 3 software packages (above) with CP/M® and PASCAL pseudo-disks now offered as options (\$39 each).

(\$3 shipping, US)

VC-EXPAND MEMORY EXPANSION FOR VisiCalc®


ONLY **\$100**

Dealer Inquiries Invited

Expand memory available to Personal Software's 16 sector VisiCalc®. Add 32K, 64K, or even 128K to your present workspace (even if you already have a 16K card in use!) with this program plus one or more Saturn boards. Simple to use.

(\$2 Shipping, US)

Computer Data Services
P.O. Box 696
Amherst, NH 03031
(603) 673-7375



form and schedule individually to ensure that the new data entered is correctly calculated and reflected throughout.

Taxpayers are saved by name to the data disk or disks and you can switch from one disk to another. Each time you switch disks the taxpayers saved on that disk are displayed.

There are two ways to obtain printed output. Control P allows you to print a copy of the form displayed on the screen. Selecting "Print Tax Forms" from the Tax Preparation Menu will print out facsimile forms in a format acceptable for filing with IRS, EXCEPT FOR FORM 1040! The IRS requires that Form 1040 be printed on a preprinted form. The print option allows you to print the data for the 1040 on a preprinted Form 1040, or you may print out the facsimile form 1040 and copy it to the preprinted form. If you plan to submit the printouts of the facsimile forms and schedules, the IRS requires that they be submitted on quality, lined, machine paper.

A sample disk named "Uncle Sam" is included in the package for you to play around with and to familiarize you with the program.

I did encounter some difficulties, however, and these were:

1. It is necessary to type somewhat slowly when making entries otherwise letters will be skipped. A number of times I had to correct omissions due to this problem.

2. In Schedule C, the program does not figure any depreciation. You are referred to their ASSETS MANAGER program. This information is not difficult to figure and type in. However, it seems to me that having bought a program to figure the tax return, it should perform as expected. Form 4562 which covers depreciation on equipment bought during 1981 was not included although there were pages in Schedule C under Depreciation to cover these items.

3. Depreciation for equipment such as Apple which would be listed on Form 2106 - Employee Business Expenses is not deductible unless all deductions are itemized. Tax Manager calculates tax both ways and uses the method which is most advantageous. However, if it takes the standard deduction, it does not disallow the items on Form 2106 which are not allowed due to taking this deduction. This should be watched for if you use 2106.

4. When you have completed the forms and select "Print Tax Forms", the program asks if you want to save this

return. You input "Y", of course, then you are told to turn to Disk Side #2 and press Return. You are supposed to get a print menu at this point. However, what I got was the Tax Preparation Menu again. In order to get the print menu, you have to press Reset, which, of course, clears the program from memory. Then you reboot with PR #6. This gives you the print menu, which indicates that there is no current taxpayer in memory. You have to "Select a New Taxpayer", which would be the name of the person whose return you were just working on, and wait while it is reloaded into memory. Then you can select the forms in the sequence you prefer and print. This works but it is awkward and time consuming.

Other than the problems mentioned above, I found that the program worked well and I had fun running it. If you try it and find any other differences, I would appreciate hearing from you.

Ruth Dill
204 N. Main St.
Highlands, TX 77562
672-4317 (Work)

APPLE 8-BIT 8-CHANNEL A/D SYSTEM

- 8-BIT RESOLUTION
- ON BOARD MEMORY-
(Just peek at data)
- FAST CONVERSION -
(.078 ms per channel).
- ELIMINATES NEED TO WAIT FOR A/D CONVERSION
- A/D PROCESS TOTALLY TRANSPARENT TO APPLE.
- FULL SCALE INPUTS CAN EASILY BE CHANGED BY USER.

APPLIED ENGINEERING'S A/D board is a breakthrough product for all APPLE owners giving real world data at a really affordable price. Diverse applications include monitoring of:

..... TEMPERATURE HUMIDITY WIND SPEED WIND DIRECTION
..... LIGHT INTENSITY PRESSURE RPM SOIL MOISTURE
..... AND MANY MORE

CONTRIBUTED PROGRAMS ARE DISTRIBUTED FREE TO ALL A/D OWNERS IN OUR NEWSLETTER.

See your dealer or contact -

APPLIED ENGINEERING
P.O. BOX 470301
DALLAS, TEXAS 75247

\$ 129

MASTER CHARGE & VISA WELCOME



(214) 492-2027



7:00 AM - 11:00 PM 7 DAYS A WEEK

APPLE PERIPHERALS ARE OUR ONLY BUSINESS

THE HAAUG-HAM, by Ed Seeger, WB5PTW

With increasing numbers of ham radio operators joining HAAUG there are more and more questions arising about how to use the Apple as a part of an amateur radio station. I've been a ham operator for over twenty years now, and an Apple owner for three-and-a-half. And while I can't claim to have "seen it all", I have tried to pay attention to who's doing what, and where and how. Let me tell you what I think I know so far, and I'd welcome your own information and observations to be added to mine.

Many of you have already seen Chris Galfo's set of programs for video-displaying CW, RTTY and SSTV. (That's Morse code, Radio Teletype and Slow-Scan Television, respectively, to you non-hams who are reading this.) Dr. Galfo, WB4JMD, produced this nifty software on cassettes and sold them out of his home back in 1978 or '79. I bought those programs and the accompanying documentation. Unfortunately, the packages seem to be out of print these days, which is a shame, because they do a fine job of turning the dah-di-dah-dit dah-dah-di-dah, the deedle-deedle-deedle and the eight-second buzz saw tones into TV displays that even the non-ham can readily appreciate.

I still use Galfo's software, but run it from a DOS 3.3 disk these days. The Morse package requires a little hardware to turn the dits and dahs from your speaker into the five volt TTL levels the Apple game paddle connector can handle. The machine language software takes it from there. I never did get the circuit working that was included in the documentation, however. But I have found another solution using my RTTY terminal unit. More about that below.

Transmitting code is easier. The program accepts text from the Apple keyboard -- it even remembers your stock phrases and calls them up on command through a set of what are in effect "keyboard macros" -- and squirts the text out ready for direct connection to your keying circuit. If you are impolite enough to speak while being spoken to, you can store your replies in a memory buffer -- this is called a "live keyboard" -- and automatically empty your ramblings over the air without further intervention on your part. There's even a Times Square-like moving marquee that shows your text traveling from right to left and onward and upward into the ether. If you think programs supplied on cassettes must have been truly Dark Ages material, you are wrong. This stuff still impresses, even in these modern times of Apple DOS and expensive disk-based software.

Displaying and transmitting radio teletype is done in much the same fashion. You do need some kind of a terminal unit to translate the sweet sounds of Baudot into voltages the Apple can in turn translate into even sweeter ASCII. I confess I overdid things a bit and went whole-hog for a spiffy IRL FSK-1000 terminal unit, with all three shifts, autostart, and a contin-

uously-tunable shift for people who know what to do with features like that. I don't, but it's there for when I find out! It only costs $100+10^*RND(9)$ percent more to go first class. But all you really need is a no-frills demodulator. Fletcher makes one and circuits abound if you're up to a little home brewing.

I have been amazed at the number of hams out there who are doing computerized RTTY. A lot of them are using Apples and some are all the way into stand-alone dedicated units; why, I don't know. After you're done hamming, what can you do with the things? At least with a true computer, you can keep recipe files, or whatever those tacky articles in the airlines' in-flight magazines think you and I do with our machines. Even more hams are running the TRS-80. Although I have not begun to send RTTY myself, I do a lot of "reading the mail" and it doesn't take long to find out who's using what equipment.

Price considerations aside, the popularity of the Radio Shack in the ham shack seems to derive from the success of the Macrotronics, Inc., "Terminall" device and its predecessors. Dr. Ron Lodewyck, N6EE, and Wayne Reindollar developed this hardware/software package in the late 1970's and marketed an Apple version as model A-650, the TRS-80 version as the M800 with M80 interface. Apparently, the TRS-80 users out-demanded the Apple users and the A-650 was discontinued, although Amateur Electronic Supply still has a few on the shelf.

I bought the documentation for that early device and judged the whole setup to be terribly unwieldy to use, certainly not as manageable as WB4JMD's software with a good outboard terminal unit. Admittedly, the A-650 was more powerful, with such features as optional line numbering and software switching of mark and space tones that Galfo had not provided. On the other hand, Galfo's project was undertaken in the days when many Apples had only a scant 8K of memory (rev. 6 and earlier) and it cost a bundle to upgrade to even 16K. Lodewyck, whose design trailed Galfo's by only a matter of months -- and which was, by the way, also cassette-based -- Lodewyck was able to take advantage of the availability of cheaper RAM and so his package assumed and required 16K. Naturally you can do a lot more in twice the memory.

Macrotronics has not sold a system for the Apple ham for some time now. However, I recently telephoned them and learned that a "Terminall" for the Apple is expected to be released "soon". As my mother used to say to me as she was on her way out of the house, "don't expect me till you see me". The new unit is reported to be a great improvement over the original A-650 and will undoubtedly as a minimum match feature-for-feature the existing TRS-80 package.

Take a look at Macrotronics' ad on page 95 of the March, 1982, "QST" magazine to see what Rat Shack owners have that we do not. I do hope our version will provide for saving received text to disk, or even allow us to prepare text ahead of time in a DOS file and call it up on demand. Such capability is a virtual sine

qua non for advanced RTTY operators, who have for years used punched tape for storage of artwork and brags. NOTE to non-hams who have read this far: BRAG is not a new DOS command for machine language; it's merely a canned "mine's bigger than yours" rap that tells the ham on the receiving end what equipment I'm using and dares him to have as expensive a station! You know, "ask me about my grandbaby".

Other hams among us have had reasonable success with the "Radcom Plus+" Amateur Radio Communications Package, built to the design of Alex M. Massimo, AF6W, in San Diego. Like the Macrotronics approach above, Radcom Plus+ is a software/hardware system, with a terminal unit demodulator built onto an Apple slot #2 card. The software, which at least as first released required so-called "Interger" (sic) BASIC, was developed by C. H. Galfo, WB4JMD! During his disappearance, Galfo had considerably upgraded his original program. As supplied with the Radcom board, it now was able to load and save text to and from disk and memory buffer, log contacts to disk, repeat the entire previous transmission and gave on-screen tuning indicators. Again, the key was cheap RAM, now that just about everybody had a 48K coffee warmer plugged in.

But there was a catch, and Macrotronics is currently guilty of this also. What about the many, many hams who have been around a while and already have money tied up in a terminal unit? Why should we have to buy another TU, this one on an Apple peripheral card, just to be able to run good ham software? Massimo's product is an inseparable package, as is Lodewyck's. Love me, love my tractor. We know from Galfo's first programs that CW and RTTY software does not have to be hardware-dependent. Sure, it's nice for the beginner who wants an easy way to break into computer hamming and RTTY at the same time; he or she is relieved not to have to make decisions about which terminal to buy or which Morse decoder to wire up. (I gave up on Galfo's circuit and finally just adjusted my TU to put out TTL voltage swings when I tuned over top of a CW station.)

There are two possible answers. The truly creative ham-computerist will rip off a copy of the Massimo-Galfo software, disassemble it while searching for the I/O routines aimed at that card in slot #2, and will redirect I/O through, say, the game port or maybe the cassette jacks, which just lie there unused anyhow after the first month with your Apple. Surely this is theoretically possible, and the new storing and logging features of the software make the effort attractive, although illegal. If Massimo is sharp, he's already working on just such a possibility.

A second approach lies within a small ad in a recent issue of "Micro", the 6502/6809 journal. It's the "Egbert RTTY Program". This is a \$40 program that demodulates RTTY in software! That's right, no black box with mark-space indicators, no current loop, no oscilloscope (and probably no possibility of attaching one, either). I've put my money out (what, me disassemble somebody's software?) and have received it. I will report on it in an upcoming issue of "Apple Barrel".

According to the blurb, Egbert's program uses the cassette ports in direct connection to the transmitter/receiver. The Apple both generates and decodes RTTY tones at 60, 67, 75 and 100 words per minute Baudot and 110 baud ASCII. A tuning indicator is accomplished through one of the hi-res screens. Received text and art can be saved off to disk, there is automatic CW identification, and more. \$39.95! I'll let you know, but be warned that if it's good you'll have to mail away for your own copy. My ham call is coded in there for automatic CW identification!

GAME CONTEST RESULTS

The game contest held at the Saturday Meeting on February 27 was a big success, thanks to the efforts of Susan Wettling. The contest was limited to youngsters through high school, with two groups, 4 through 11 and 12 through 18. Three games, Apple Panic, Snack Attack, and Space Eggs were set up on four Apples, with each participant permitted two chances on each game. The results of the competition are as follows:

Junior Division

Michael Rogge, age 10, Apple Panic, score 13980
Steven Otiliar, age 11, Snack Attack, score 2900
Susan Scheuer, age 10, Space Eggs, score 1610

Senior Division

Chris Myers, age 16, Apple Panic, score 107000.
John Coolidge, age 15, Snack Attack, score 3798

Special thanks to Susan, the judges, DeWayne Van Hoozer for loaning his custom-painted red Apple, and the donors of the prizes, Moore Business Center, Computer City, Computer Technique, Computercraft, and the Compushop.

APPLEFEST/HOUSTON

At Applefest '82 hundreds of manufacturers, distributors, and dealers will showcase the entire spectrum of Apple-compatible products including computers, components, peripherals, plug-in cards, publications, software, etc. for office, home, and school. This year Applefest will be held in Houston at the Albert Thomas Convention Center November 19-21 from 1 P.M to 10 P.M. daily. Admission charge will be \$5 per day, \$8 for 2 days, \$12 for 3 days. Plan to attend!!

ANOVA by Dynacomp

A Review by Nick Fotheringham

Analysis of variance (ANOVA) is a powerful statistical tool designed to test the equality of means of several samples. For example, in an agricultural experiment it could be used to test whether or not corn plants grew at the same rate in different test plots, and whether different fertilizer or water treatments applied to these plots significantly affected the rates of growth.

The ANOVA package offered by Dynacomp is supplied on a DOS 3.2 disk which can be "muffined" to a 3.3 version. The menu offers five options: (1) an unbalanced, replicated, one-way, n-level ANOVA, (2) a balanced, replicated, 2 factor, n-level ANOVA, (3) a balanced, replicated 3-5 factor, n-level ANOVA, (4) a balanced, replicated, n-factor, 2 level ANOVA, and (5) an editing routine. Data may be entered from the keyboard or from a disk, although data from a disk must have been stored with a precisely defined structure, which is only likely to exist if the data file had been created by the ANOVA package during a previous session. The program length is about 12K bytes, and it is designed to run on a 16K or larger system.

I have tested the one-way and 3-way procedures using textbook data sets. The decimal points in the mean squares for the one-way ANOVA had been moved, apparently to provide a better output format, and thus the output was not correct. The lengthy output for the 3-way ANOVA raced passed my screen without benefit of a stop every 24 lines. Thus it required several runs for me to observe that the output was correct. I found the package disappointing in its dependence on balanced designs for all but the one-way ANOVA, its lack of customized output, and its rigid disk file structure requirements. Fortunately, once "muffined", the program can be listed and modified. I immediately enhanced my version by adding 2- and 3-way unbalanced ANOVA's to the menu. It also is a reasonably simple enhancement to enter an array of factor names to the input so that the output can be printed using "DOSEAGE", "SEX", "AGE", etc., instead of "FACTOR 1", "FACTOR 2", etc. The disk file generated by the program is a sequential file of data points containing almost no information about its own structure. Thus it is advisable to take ample notes whenever data is stored by the program to ensure that it can be recovered properly.

Finally, error traps appear to be very limited in this program. Most wrong guesses as to the input requested by the program resulted in a rude termination with no interpretable message.

** WANT / DON'T WANT ADS **

For sale: Heuristics Speech Lab, \$100. Call DeWayne Van Hoozer at 668-8685

For sale: Apple Silentype Thermal Printer with interface, \$300. APP 9" B&W Monitor, \$75. VISICALC 3.2, manual - \$50. Call David Dodd evenings at 893-5869

For sale: Teletype ASR-43M Printer Terminal, \$450. 300 Baud Modem, \$100. Call Edwin Miller at 664-5216

For sale: T.I. 59 Calculator with extras, \$170. Call J. Totten evenings at 644-4824

For sale: Time II Clock card by Applied Engineering, \$90. Wanted: Mtn. Hardware format clock card. Call Paul Maddock at 783-1521.

Wanted: Apple II+, Disk drive, color monitor, Dow - Jones, modem. Call Merrill Siegel at 467-9826

Wanted: Epson MX-80 or equivalent, new or used. Call Fred Follse during the day at 222-0322.

1

APPLE MUSIC SYNTHESIZER BREAKTHROUGH

- COMPLETE 16 VOICE MUSIC SYNTHESIZER ON ONE CARD, JUST PLUG IT INTO YOUR APPLE, CONNECT THE AUDIO CABLE (SUPPLIED) TO YOUR STEREO AND BOOT THE SUPPLIED DISK AND YOU'RE READY TO ENTER AND PLAY SONGS.
- IT'S EASY TO PROGRAM MUSIC WITH OUR "COMPOSE" SOFTWARE. YOU'LL START RIGHT AWAY AT INPUTTING YOUR FAVORITE SONGS. OUR MANUAL SHOWS YOU HOW, STEP BY STEP. THE HI-RES SCREEN SHOWS WHAT YOU'VE ENTERED IN STANDARD SHEET MUSIC FORMAT.
- WE GIVE YOU LOTS OF SOFTWARE. IN ADDITION TO "COMPOSE" AND PLAY PROGRAMS, THE DISK IS FULL OF SONGS READY TO RUN.
- FOUR WHITE NOISE GENERATORS (GREAT FOR SOUND EFFECTS).
- PLAYS MUSIC IN TRUE STEREO AS WELL AS TRUE DISCREET QUADRAPHONIC.
- ENVELOPE CONTROL (VOLUME)
- WILL PLAY SONGS WRITTEN FOR ALF SYNTHESIZER (ALF SOFTWARE WILL NOT TAKE ADVANTAGE OF ALL THE FEATURES OF THIS BOARD, THEIR SOFTWARE SOUNDS THE SAME ON OUR SYNTHESIZER).
- AUTOMATIC SHUTOFF ON POWER-UP, OR IF RESET IS PUSHED.
- MANY, MANY MORE FEATURES.

ALL ORDERS SHIPPED SAME DAY
SEND \$159.00 CHECK OR MONEY ORDER
(TEXAS RESIDENTS ADD 5% SALES TAX)

APPLIED ENGINEERING
P.O. BOX 470301
DALLAS, TEXAS 75247

MASTER CHARGE & VISA WELCOME



(214) 492-2027



7:00 AM - 11:00 PM 7 DAYS A WEEK
APPLE PERIPHERALS ARE OUR ONLY BUSINESS

APPLE III NEWS

Three utility programs for the APPLE III have been added to the HAAUG software library. One is the old standby, FILE CABINET, which has been adapted to the APPLE III. With the increased memory and execution speed of the Three this is an excellent freebe. A second program is an improved version of the APPLE II emulation diskette. This version of the emulation diskette allows you to configure the RS 232-C output to a number of printers including adjusting the baud rate, odd or even parity, etc.. It increases the utility of the emulation mode significantly. The third diskette has a self-documented utility for converting APPLE II DOS 3.3 text files to APPLE III SOS text files. Many APPLE II basic programs can be converted to the APPLE III and run with minimum changes with this utility.

There are a number of pre-packaged programs now available for the APPLE III at the local stores. There are two word processing packages: WORD JUGGLER by Quark Engineering and APPLE WRITER III from Apple. APPLE WRITER III is significantly different from the original APPLE WRITER. It will interface with VISICALC so VISICALC screens can be included in your text. It will also interface with a MAIL LIST MANAGER program also available from Apple Computer Co.. Additional programs include PASCAL UTILITIES, a set of commonly used programming routines which can be used with APPLE III Pascal. A simple text editing program for program development called SCRIPT III. A modem utilities program, APPLE ACCESS III, is also available. This latter program adds the ability to interface the APPLE III with a modem and use the various remote data bases such as The Source, Dow Jones, etc.. This utility also has the capability of uploading and downloading text files and will allow the APPLE III to be connected to mainframes, etc. by configuring for various terminal modes. APPLE III BUSINESS GRAPHICS will plot data input from the keyboard or from VISICALC, Basic or Pascal files. In addition to supporting Qume and Silentype printers, APPLE III BUSINESS GRAPHICS will output to Hewlett-Packard and Houston Instrument plotters. DESK TOP PLAN III from Personal Software is also available. This is a powerful financial reporting system which has been available for the APPLE II for several years. The PFS database management system is also available for the Three. While this list is not complete, most of these products have shown up in the last few weeks. It appears that products for the APPLE III are beginning to hit the stores in a big way.

APPLE III owners who sent in their warrenty cards should be receiving a package from Apple Computer announcing the latest software enhancements. All system software including System Utilities, Visicalc III, and Business Basic have been upgraded to Versions 1.1 to use the improved SOS 1.1. Revised manuals are also available. This package also includes a program diskette, Apple III Confidence Program, for testing all aspects of the Apple III including disk drives.

No mention of new APPLE III products would be complete without mentioning the APPLE III ProFile a five megabyte Winchester type hard disk. This is also on display at most local Apple dealers. Business Basic and Pascal files can be intermixed on ProFile.



Verbatim

Flexible Disks

Introducing **DATALIFE** flexible disks from Verbatim with seven improvements: 1) Every Verbatim disk meets or exceeds the most demanding of IBM, Shugart, ANSI, ECMA and ISO standards; 2) Reinforcing hub rings on every disk (except item nos. FD34, FD32 and FDD344); 3) An improved liner; 4) An advanced polishing technique; 5) A longer-lasting lubricant; 6) A thicker, more durable coating; 7) A 100% error-free certification backed up by a full one year warranty.

FOR THE APPLE COMPUTER

Soft Box \$ 31.50/Box of 10

Plastic Box \$ 32.50/Box of 10

All minidisks have reinforcing hub rings for longer life and come with a one year guarantee.

VERBATIM Head Cleaning Disks and Kits

10 Cleaning Disks \$ 20.00

*Head Cleaning Kit \$ 12.50
(reusable)

*For limited time, buy 10 disks and get kit free. (See corner below)



The Apple Desk

42'W x 26'D x 26'H Desk with tubular steel legs, sheet metal modesty panel and FORMICA laminate top. Four adjustable leveling feet standard; casters optional.

Suggested Retail \$ 278.00

APPLE CLUB PRICE \$ 239.00

OTHER ITEMS We Supply:

*Epson MX70/80 Ribbons

*NEC Spinwriter Ribbons

*Many Styles of Diskette Storage Systems

We Can Supply The Computer or Word Processor At Your Office, Too.

CTI

TO ORDER, PHONE US

2715 Bissonnet #216
Houston, TX 77005
526-9666

(Add 6% Tax To Orders)



Take this coupon to CTI/your Verbatim
and Get a Datalife Head Cleaning Kit Free when you buy
10 Datalife Head Cleaning Disks.
NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____
DEALER/DISTRIBUTOR C.T.I. _____
Limit: One coupon per customer
This Offer for a limited time only.

AN IMPROVED BOOT UTILITY PROGRAM
BY RICHARD PARRISH

I had recently bought a language card and talked a friend of mine into doing the same. He wanted to expand the capacity of programs like Visicalc, but he wanted to still use his Integer Basic Firmware card for his kids who liked to play games in Integer BASIC without loading the language card. It had to be automatic for his kids to use. After looking through the DOS manual and some other references I came up with this program. It will first check to see if you have a language card, then check if it has already been loaded with a BASIC, even after a PR#6!. If the latter is the case, it will restore it, but if the card is empty it looks at slot four for a firmware card. If that is the case then the program will modify DOS to recognize it in slot four. If there is nothing in slot four it will load the language card with Integer BASIC. This program was written in Applesoft but can be easily adapted to Integer BASIC or modified to take any language card, RAM or ROM, in any slot!

Lines 1 through 7 POKE the language card finder into memory. The machine language code subroutine works by POKEing the slot number times 16 into memory location 771. Then a CALL 769 is done to execute the subroutine (line 18) which returns with a number at location 768 which must be PEEKed. If a PEEK(768) yields a zero then there is no language card in that slot, a 1 means an empty language card, and a 2 represents a loaded language card or firmware card. If you have any questions or want to convert this program to Integer BASIC then call me at 448-5952.

JLIST

```
1 TEXT : HOME :D$ = CHR$ (13) +  
     CHR$ (4)  
2 FOR I = 768 TO 820: READ J%: POKE  
     I,J%: NEXT  
3 DATA 0,72,162,0,173,0,224,157,  
     128,192,205,0,224,240,24,238  
     ,0  
4 DATA 3,173,1,224,173,1,224,201  
     ,0,208,14,238,0,3,189,129,19  
     2,189,129  
5 DATA 192,169,32,141,0,224,141,  
     130,192,104,96,0,0,0,0,0,0  
6 PRINT "UNIVERSAL BOOT UTILITY  
     DOS 3.3"  
7 POKE 42424,128: POKE 42432,129  
     : POKE 768,0: POKE 771,0  
8 GOSUB 18  
9 IF X% = 0 THEN 12  
10 IF X% = 1 THEN 13  
11 IF X% = 2 THEN 21
```

```
12 END  
13 POKE 768,0: POKE 771,64: REM  
     SLOT# TIMES 16  
14 GOSUB 18  
15 IF X% = 0 THEN PRINT "( NOW  
     LOADING LANGUAGE CARD )": GOTO  
     19  
16 IF X% = 2 THEN PRINT "INTEGE  
     R BASIC IS AVAILABLE IN SLOT  
     4"  
17 POKE 42424,192: POKE 42432,19  
     3: GOTO 20  
18 CALL 769:X% = PEEK (768): RETURN  
19 X% = PEEK ( - 16255) + PEEK  
     ( - 16255): PRINT D$"BLOAD I  
     NTBASIC,A$DOOO"  
20 X% = PEEK ( - 16254): GOTO 22  
21 PRINT "INTEGER IS READY...": GOTO  
     20  
22 END
```

SOFTWARE SALE:

Data Capture 4.0 intelligent terminal program, \$40
dataCope Single Disk Sort ver 2.0, DOS 3.2, \$25
dataCope Text File Copy ver 1.0, DOS 3.2, \$25. (both for \$40)
Super Invader (tape), \$10
Dan's Disk Utility + Single Disk Copy, DOS 3.2, both for \$10
Escape, by Muse. Try to escape from the maze. Tape. \$6
Maze Game, by Muse. (tape) More escape. Both for \$10
Electronic Index Card File, tape, but works on disk. DBMS. \$10
Electric Crayon, by Muse. (tape) 16-color LoRes drawing. \$8
U-Draw, by Muse. (tape) HIRES drawing. \$8
Screen Machine, by Softape (tape) Powerful HIRES utility. \$15
Bomber! (tape) Bob Bishop. A HIRES classic. \$8
Golf, by Instant Software (tape) LoRes. \$8
The games are excellent for children or for new Apple users.
Call Ed Seeger, 723-6919. All software is original.

MORE SOFTWARE:

App-L-ISP, by Datasoft, Inc. A Full LISP interpreter, with editor, prettyprinter, manual, "Towers of Hanoi" demonstration program. This is a recursive language, often applied to so-called "Artificial Intelligence" work. No problems with it, I'm just using a different and much more expensive LISP these days.
\$75.00 Ed Seeger, 723-6919.

1



EXTEND THE POWER OF APPLESOFT WITH FOUR NEW & POWERFUL COMMANDS

WITH THE SORT AND FORMAT ROMS IN YOUR MOUNTAIN COMPUTER'S ROMPLUS* OR ANDROMEDA'S ROMBOARD* YOU WILL MAKE APPLESOFT* BASIC ONE STEP MORE POWERFUL THAN THE MOST ADVANCED LANGUAGE AVAILABLE. AND - BECAUSE READ ONLY MEMORY NEVER FORGETS, THESE NEW COMMANDS BECOME A PERMANENT PART OF APPLESOFT'S* BASIC LANGUAGE.

**SORT
ROM** TM

ARRAY SORTING - Sort any single dimensioned (or multi-dimensioned-indirectly) integer, real, or string array. Unparalleled sorting speeds are accomplished by a unique machine code and does not use any scratch arrays or additional memory. A typical sort time for a 1000 item array is 3.5 seconds. Sort options include: create a record array, reverse sort, subrange sort, and a sort activity indicator.

ARRAY DELETION - Unused arrays, which can consume large amounts of memory space, can be deleted to free up memory or allow a previously dimensioned array to be redimensioned **\$39.95**

**FORMAT
ROM** TM

WORD PROCESSING - A powerful and versatile system which will properly format your program's output on your monitor or printer. You get all the commands of a dedicated word processor plus the power of Applesoft's commands. Define or change printing margins, page width, page length, text centering, right and left justification, indenting and outdenting, etc., with simple basic commands. By combining the commands of the format ROM and Applesoft you can print more than one copy with a for-next loop or insert different information with input commands or take it from your existing arrays.

PRINT...USING will tabulate, right justify, line up all decimal points, pad the right and left side of Alpha/Numerical data with any predefined character, insert commas, and can be used within formulas or equations which will then format the mathematical result **\$49.95**

FORMAT ROM AND SORT ROM will support all printers, 80 column boards, lower case adapters, and requires 48K, FP in ROM, DOS 3.2 or 3.3, M.C.'s ROMPLUS* or Andromeda's ROMboard* SAVE MONEY BY ORDERING THE FORMAT ROM AND SORT ROM AS A SET **\$84.95**

OTHER ROMS AVAILABLE: All ROMs are compatible with MC's Romplus or Andromeda's ROM Board.

- DUAL DOS ROMS - Switch from one DOS (3.2 or 3.3) to the other without booting	\$54.95
- FP RENUMBER/MERGE ROM - Apple Computer's infamous renumber program	\$39.95
- BASIC'S ROM - Will boot standard, special, and dedicated 13 sector disks	\$39.95
- FP EDITROM - Global search, change, and remove. (Works jointly with PLE)	\$39.95
- COMMAND ROM - Catalog Command Menu and Disk Map	\$39.95
- DISK COPY/SPACE ROM - Duplicates 13 or 16 Sector Disks	\$39.95
- FP UTILITY ROM - Auto Line Numbering, LIST CTRL, RESURRECT KILLED PROG. Alphabetize DISK CAT., Expung DOS	\$39.95

(Check or M.O.) Visa or MasterCard Accepted

SOFT CTRL SYSTEMS, BOX 599, WEST MILFORD, NJ 07480 **201-728-8750**

*REGISTERED TRADEMARK
ALL FIRMWARE IS COPYRIGHTED

DISK COPYING PROBLEMS

BY

Richard Davis

At the January 31, 1982 H.A.A.U.G. meeting I had six disks copied from the club library. Of the six disks only one was readable on my Apple. A little research reveals the probable cause and a simple solution.

The copies were made with COPY II PLUS which is a good fast copy program but it must be used properly to achieve satisfactory results.

I will refer to a first generation copy (or disk) as one that has been initiated and then had data added by COPYA, FID, SAVE, BSAVE, etc. These disks all have a standard format that includes synch marks, Address Field Headers (D5 AA AD) and Trailers (DE AA EB) with the address information and the data between the respective headers and trailers. The gaps between Address Field Trailers and Data Field Headers have a few synch marks (minimum is about 5) while the gaps between the Data Field Trailers and Address Field Headers have more synch marks, usually quite a few more. These can easily be observed by using a program listed in "BENEATH APPLE DOS" by Don Worth and Pieter Lechner (Quality Software).

COPY II PLUS uses these headers and synch marks to get oriented for making a copy and initiates and writes the track all at one time. However, the distribution of synch marks is much different on a second generation copy (when compared to a first generation copy). However, there is still sufficient information for the disk to be read and used by DOS, COPYA, FID, etc.

When COPY II PLUS is used to make a third generation copy from a second generation copy the degradation of synch marks is so great that the third generation copy is seldom useable. There is usually no indication that the copy has been unsuccessful until one attempts to use the third generation copy. A nibble dump of the third generation disk shows large blocks of garbage without headers (probably because the copy program did not get in synch) and large blocks of synch marks. On one third generation copy we were even able to find two sectors still intact and readable that had been present before the copy operation and should have been scratched or written over. In other words COPY II PLUS failed to write anything on these sectors.

Cont'd.

COPYA will satisfactorily copy a second generation COPY II PLUS disk, creating a new first generation so the process can restart. All that is needed for the H.A.A.U.G. Library sessions is to be sure that all the source disks used are first generation disks created with one of the programs that properly initiates the disk. Then the QUICK (and dirty) COPY II PLUS can be used at the copy sessions satisfactorily.


It should be noted that a COPY II PLUS copy using the "Standard Header Option" seems to build a satisfactory third generation copy but we have not tested beyond that point. We use Version 2.2 of COPY II PLUS. Later versions may not be the same.

I am aware that our disk drives do not run at the same speed and suspect that this may aggravate the problem. However the speed difference does not bother any other operations. Nibble dumps of the unreadable copies from the library showed the same pattern as our third generation copies.

Time II

The most powerful, easiest to use, clock for your APPLE

- TIME IN HOURS, MINUTES AND SECONDS.
- DATE WITH YEAR, MONTH, DATE, DAY OF WEEK AND LEAP YEAR.
- FAST DATE AND TIME SETTING.
- PROGRAM SELECTABLE 24 HOUR MILITARY FORMAT OR 12 HOUR WITH AM/PM FORMAT.
- ± 30 SECOND ADJUST.
- DIP SWITCH SELECTABLE INTERRUPTS PERMIT FOREGROUND/BACKGROUND OPERATION OF TWO PROGRAMS SIMULTANEOUSLY SO YOU CAN CALL UP SCHEDULES, TIME EVENTS, DATE LISTINGS, AND OTHER PRINTOUTS.
- CRYSTAL CONTROLLED FOR .0005% ACCURACY.
- LATCHED INPUT AND OUTPUT PORTS FOR THE EASIEST PROGRAMMING IN BASIC.
- ON BOARD BATTERY BACKUP POWER FOR OVER 4 MONTHS POWER OFF OPERATION (BATTERY CHARGES WHEN APPLE IS ON).

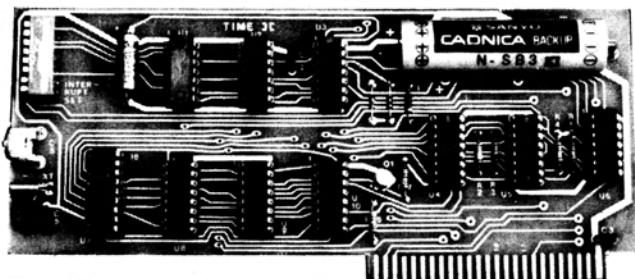

- INCLUDES 16 SECTOR DISK WITH OVER 25 CONTRIBUTED PROGRAMS SO YOU CAN PUT YOUR TIME II TO USE RIGHT AWAY.
- TWENTY-THREE PAGE OPERATING MANUAL INCLUDED, WITH MANY EXAMPLES OF PROGRAMS TO USE WITH YOUR APPLE IN ANY CONFIGURATION.

ALL ORDERS SHIPPED SAME DAY
SEND \$129.00 CHECK OR MONEY ORDER
(TEXAS RESIDENTS ADD 5% SALES TAX)

APPLIED ENGINEERING
P.O. BOX 470301
DALLAS, TEXAS 75247

MASTER CHARGE & VISA WELCOME



(214) 492-2027



7:00 AM - 11:00 PM 7 DAYS A WEEK

APPLE PERIPHERALS ARE OUR ONLY BUSINESS

PRINT AT

=====

By: D. Van Hoozer

The 'PRINT AT' subroutine on the following page is the first cut version of a more extensive print formatting system which includes implementation of the 'PRINT USING' function for Applesoft. 'PRINT AT' is used for moving the cursor to a specific spot on the Apple][screen.

I used Bob's S-C Assembler to code the source, but if you do not have an assembler you can still use the subroutine by copying the POKE statements listed below. I used Kramer's POKE maker to generate them. For information on the POKE maker see Kramer's article in the previous issue.

There is at least one modification that I would recommend making. At line 1290 there is a JSR FP.CHRGET instruction which could be changed to:

```
JSR FP.CHRCLS      /* CHECK FOR '))' */
JMP FP.PRINT      /* GOTO TO THE FP PRINT ROUTINE */
```

Delete the RTS at 1300. It's not needed.

This modification allows you to append normal print stuff after the last '))' thus doing away with a couple more keystrokes.


JLIST

```
5  HOME
10 FOR XX = 768 TO 799
20 READ BYTE: POKE XX,BYTE
30 NEXT XX
40 DATA 32,187,222,32,123,221,3
      2,251,230,202,134,37,32,34,2
      52,32,190,222,32,123,221,32,
      251,230,202,134,36,32,177,0,
      96,0
50 & (6,4): PRINT "ROW 6, COLUMN
      4"
60 END
```

1

**NEW LOW PRICE
DIRECT FROM MANUFACTURER
\$120.00**

EXPAND ✪ ENHANCE

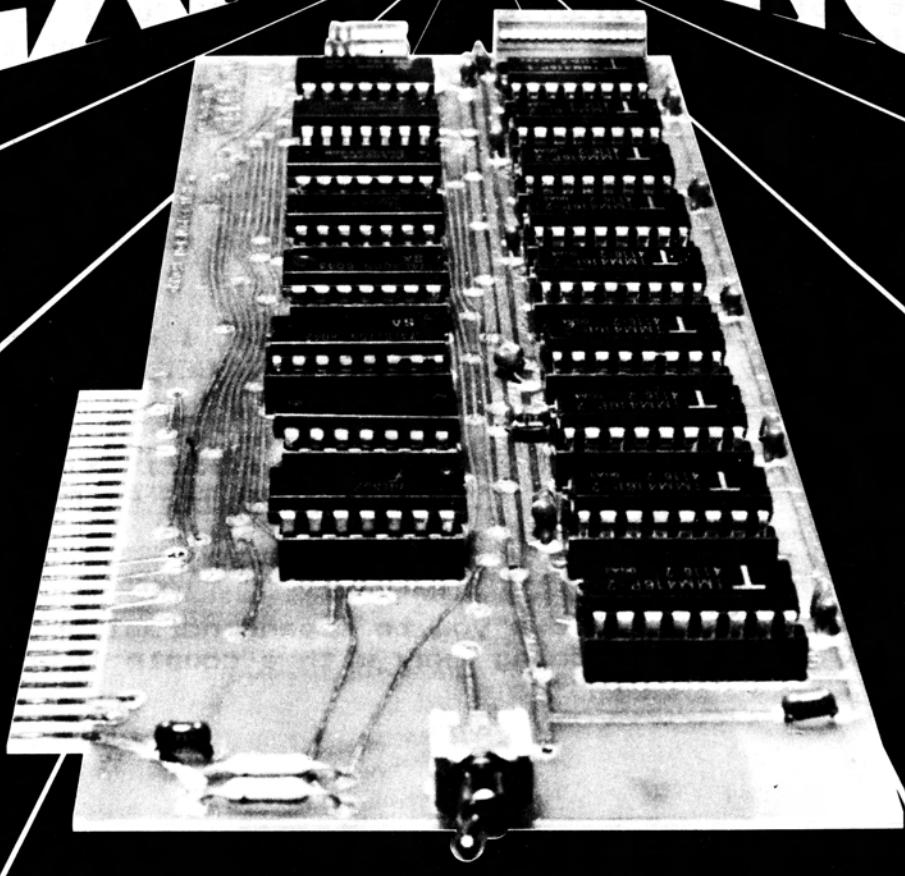

16K RAM EXPANSION BOARD FOR THE APPLE II* \$120.00

The Andromeda 16K RAM Expansion Board allows your Apple to use RAM memory in place of the BASIC Language ROMs giving you up to 64K of programmable memory. Separate Applesoft* or Integer BASIC ROM cards are no longer needed. The 16K RAM Expansion Board works with the Microsoft Z-80 card, Visicalc, DOS 3-3, Pascal, Fortran, Pilot, and other software. A switch on the card selects either the RAM language or the mainboard ROMs when you reset your Apple.

The Andromeda 16K RAM Expansion Board has a proven record for reliability with thousands of satisfied customers.

Now with One Year Warranty.

ANDROMEDA
INCORPORATED
Greensboro, NC. 27410
P.O. Box 19144

919 852-1482



Price for Andromeda 16K RAM expansion board now only \$120.00. Please add \$5 for shipping and handling. North Carolina residents add 4% sales tax.

*DEALER INQUIRIES WELCOME.

:ASM

```
1000 *-----  
1010 X PRINT AT  
1020 X BY D. VAN HOOZER  
1030 *-----  
1040 X  
00B1- 1050 FP.CHRGET .EQ $00B1  
DD7B- 1060 FP.FRMEVL .EQ $DD7B  
DEB8- 1070 FP.CHKCLS .EQ $DEB8  
DEBB- 1080 FP.CHKOPN .EQ $DEBB  
DEBE- 1090 FP.CHKCOM .EQ $DEBE  
E6FB- 1100 FP.CONINT .EQ $E6FB  
0024- 1110 MON.CH .EQ $24  
0025- 1120 MON.CV .EQ $25  
FC22- 1130 MON.VTAB .EQ $FC22  
1140 X  
1150 .OR $300  
1160 X  
0300- 20 BB DE 1170 JSR FP.CHKOPN /*IS IT A //*/  
0303- 20 7B DD 1180 JSR FP.FRMEVL /*GET THE ROW*/  
0306- 20 FB E6 1190 JSR FP.CONINT /*CONVERT TO INTEGER*/  
0309- CA 1200 DEX /*ADJUST FOR OFFSET*/  
030A- 86 25 1210 STX MON.CV  
030C- 20 22 FC 1220 JSR MON.VTAB /*GOTO THE RIGHT ROW*/  
1230 X  
030F- 20 BE DE 1240 JSR FP.CHKCOM /*IS THE NEXT CHAR A COMMA?*/  
0312- 20 7B DD 1250 JSR FP.FRMEVL /*GET THE COLUMN*/  
0315- 20 FB E6 1260 JSR FP.CONINT /*CONVERT TO INTEGER*/  
0318- CA 1270 DEX /*ADJUST OFFSET*/  
0319- 86 24 1280 STX MON.CH /*SET HORIZONTAL*/  
031B- 20 B1 00 1290 JSR FP.CHRGET /*ADJUST TO POINT AT NEXT CHARACTER*/  
031E- 60 1300 RTS
```

SYMBOL TABLE

```
JLOAD PRINT AT.TEST  
JPOKE33,33  
DEB8- FP.CHKCLS JLIST  
DEBE- FP.CHKCOM  
DEBB- FP.CHKOPN 5 R = 10:C = 5  
00B1- FP.CHRGET 10 POKE 1013,76: REM JMP  
E6FB- FP.CONINT 20 POKE 1014,0  
DD7B- FP.FRMEVL 30 POKE 1015,3  
0024- MON.CH 40 HOME  
0025- MON.CV 50 & (5,5): PRINT "ROW 5 COLUMN 5"  
FC22- MON.VTAB 60 & (1,1): PRINT "ROW 1 COLUMN 1"  
:FP 70 & (R,C): PRINT "ROW #";R;" COL #";C  
1PR#0 80 FOR R = 11 TO 19  
1?CHR$(9);;"30L" 90 C = C + 1  
110 NEXT R 100 & (R,C): PRINT "HELLO AT (";R;",";C;")"  
999 END
```

JPR#0

1CALL-151

See if you can figure what this is all about.
Call the Hotline if you do.

*5000.5177

5000- D0 D5 C2 CC C9 C3 A0 CB
5008- C5 D9 A0 BD AB B0 C1 AE
5010- A0 D5 D3 C5 A0 C1 D0 D0
5018- CC C5 A0 C1 D3 C3 C9 C9
5020- AE 00 00 0D 17 17 17 17
5028- 5E 59 44 2A 59 61 58 4F
5030- 5C 5D 2A 59 50 2A 5E 52
5038- 4F 2A 5C 4F 4E 2A 4C 59
5040- 59 55 17 50 5C 59 57 44
5048- 2A 57 4B 4E 2A 4C 59 57
5050- 4C 4F 50 17 17 17 53 2A
5058- 4B 57 2A 4E 53 5D 4B 5A
5060- 5A 59 53 58 5E 4F 4E 2A
5068- 61 53 5E 52 2A 5E 52 4F
5070- 2A 40 5F 5C 5C 4F 58 5E
5078- 2A 4B 4D 5E 53 60 53 5E
5080- 53 4F 5D 2A 59 50 2A 52
5088- 4B 4B 5F 51 38 2A 2A 5E
5090- 52 4F 5C 4F 2A 53 5D 2A
5098- 60 4F 5C 63 2A 56 53 5E
50A0- 5E 56 4F 17 5C 4F 4B 5D
50A8- 59 58 2A 50 59 5C 2A 5F
50B0- 5D 2A 5E 59 2A 4D, 59 57
50B8- 4F 2A 5E 59 2A 4B 58 63
50C0- 2A 59 50 2A 5E 52 4F 2A
50C8- 57 4F 4F 5E 53 58 51 5D
50D0- 38 2A 5E 52 4F 5D 4F 2A
50D8- 57 4F 4F 5E 53 58 51 5D
50E0- 2A 4B 5C 4F 2A 4B 56 56
50E8- 2A 4E 4F 5D 53 51 58 4F
50F0- 4E 17 50 59 5C 2A 5E 52
50F8- 4F 2A 58 59 60 53 4D 4F
5100- 2A 4B 5A 5A 56 4F 2A 59
5108- 61 58 4F 5C 38 2A 61 4F
5110- 2A 52 4B 4D 55 4F 5C 5D
5118- 2A 4B 5C 4F 2A 56 4F 50
5120- 5E 2A 59 5F 5E 38 2A 53
5128- 2A 5E 52 53 58 55 2A 53
5130- 5E 5D 2A 5E 53 57 4F 2A
5138- 61 4F 2A 5E 4B 55 4F 17
5140- 57 4B 5E 5E 4F 5C 5D 2A
5148- 53 58 5E 59 2A 59 5F 5C
5150- 2A 59 61 58 2A 52 4B 58
5158- 4E 5D 38 17 17 53 50 2A
5160- 63 59 5F 2A 50 4F 4F 56
5168- 2A 5E 52 4F 2A 5D 4B 57
5170- 4F 2A 61 4B 63 2A 53 2A
*3D00G
(5000) :-

*5178.5237

5178- 4E 59 2A 5A 56 4F 4B 5D
5180- 4F 2A 4D 4B 56 56 2A 5E
5188- 52 4F 2A 52 59 5E 56 53
5190- 58 4F 2A 32 40 40 42 37
5198- 42 40 42 3F 33 2A 4B 58
51A0- 4E 2A 56 4F 4B 60 4F 17
51A8- 58 4B 57 4F 2A 4B 58 4E
51B0- 2A 5E 4F 56 4F 5A 52 59
51B8- 58 4F 2A 58 5F 57 4C 4F
51C0- 5C 38 2A 4B 58 63 2A 4D
51C8- 59 57 57 4F 58 5E 5D 2A
51D0- 48 4C 59 5F 5E 2A 57 4F
51D8- 4F 5E 53 58 51 2A 5E 53
51E0- 57 4F 5D 2A 4B 58 4E 2A
51E8- 5D 5F 4C 54 4F 4D 5E 50
51F0- 2A 61 53 56 56 17 4C 4F
51F8- 2A 60 4F 5C 63 2A 52 4F
5200- 56 5A 50 5F 56 56 38 17
5208- 17 17 13 13 57 4B 4E 2A
5210- 4C 59 57 4C 4F 5C 36 17
5218- 13 13 4D 52 53 4F 50 2A
5220- 59 50 2A 4D 59 60 4F 5C
5228- 5E 2A 4B 4D 5E 53 60 53
5230- 5E 53 4F 5D 38 17 17 00
*3D00G
(5000) :-
JPR#0

JLIST

10 A = 20516
20 D = PEEK (A)
30 IF D = 0 THEN END
40 POKE A,D + 10
50 A = A + 1
60 GOTO 20

JPR#0

JLIST

10 A = 20516
20 D = PEEK (A)
30 IF D = 0 THEN END
40 A\$ = CHR\$ (D - 100)
45 PRINT A\$;
50 A = A + 1
60 GOTO 20

JPR#0

NEW!

PRICES GUARANTEED TO AUGUST 31, 1982

THE MOORE COMPUTER SUPPLIES CATALOG

OUR NEW CATALOGS ARE IN! WE NOW HAVE THE MOST COMPREHENSIVE COMPUTER SUPPLIES CATALOG IN THE INDUSTRY! COME IN TO PICK YOURS UP AND TO CLAIM YOUR 10% HAAUG DISCOUNT.



**MOORE
BUSINESS
CENTER**

Business Forms • Computer Supplies

Business Equipment • Instant Printing

A reminder: We now carry Roytype ribbons for the Epson MX70 & MX80. MX100 ribbons will be in in April.

Everything from coding sheets to computer furniture!

1120 Smith Street / Houston, TX 77002 / (713) 237-9063

10% DISCOUNT TO H.A.A.U.G. MEMBERS

CALL FOR ARTICLES

Articles and program listings should be submitted in hardcopy form, and, if possible, on disk in Applewriter, Professional Easywriter, Palantir, or Pascal compatible files. If not submitted on disk, articles must be free of typing or spelling errors as they cannot be retyped. Diskettes will be returned to the author provided his name and address are on them. Printed material should be printed using normal size characters, a new ribbon and enhanced print if your printer is so equipped. Margins should be set at 10 and 70 for articles. Listings should be printed in 40 column mode and may be printed in compressed print. Thermal paper should be avoided because it does not reproduce well. Articles should be submitted to:

Houston Area Apple Users Group
Apple Barrel
2218 Running Springs
Kingwood, TX 77339

ADVERTISING RATES

FULL PAGE	HALF PAGE	QTR PAGE	8TH PAGE	BUS.CARDS
-----------	-----------	----------	----------	-----------

\$50	\$28	\$18	\$10	\$5
------	------	------	------	-----

Advertisements should be submitted in camera ready form to H.A.A.U.G., 2218 Running Springs, Kingwood, TX, 77339, by the 10th of the month. Charges will be billed and accompanied by a copy of the Apple Barrel containing the ad.

HAAUG MEMBERSHIP SURVEY

First Name	Init.	Last Name	Home Phone	
Street Address	Apt.#	City	State	Zip
Occupation	Company		Work Phone	
Business Address	City		State	Zip

Prefer Mail To: Home / Work / /

Ages of children using your Apple? -----

Childrens' areas of interest? -----

SPECIAL INTERESTS (Check all that apply)

Science/Engineering	---	Games/Puzzles	---
Business Applications	---	Data Base Systems	---
CP/M	---	Modems/Communications	---
Education	---	Hardware	---
Assembly Language	---	BASIC	---
Pascal	---	Forth	---
FORTRAN	---	Graphics	---
Music	---	Stock Market	---
Real Time Applications	---	DOS	---
OTHER			

CLUB PARTICIPATION AREAS (Check where you want to help)

Write articles for Apple Barrel	---	Maintain hardcopy library	---
Help prepare Apple Bbl for mail	---	Write programs for library	---
Evaluate programs for library	---	Maintain program library	---
Help run program copy session	---	Bring Apple to copy session	---
Coordinate hardware projects	---	Coordinate group purchases	---
Present lectures or tutorials	---	Arrange vendor presentations	---
Assist in new member orientation	---	Assemble and label starter kits	---
Copy starter kit disks/tapes	---	Xerox starter kit material	---
Hold office in club	---	Other	---

The HAAUG Membership survey provides a data base for use in getting members with similar interests together and in finding those who are willing to help in the running of the club. Please send in the completed form to the address below or hand it in at the meetings to the new member chairman.

MIKE KRAMER
2218 RUNNING SPRINGS
KINGWOOD, TX 77339



INTERNATIONAL PERSONNEL SERVICES

I. P. S. functions as a Personnel and Executive Search Agency in Engineering, Financial, Administration, and Data Processing Disciplines with both domestic and foreign positions. We would be happy to discuss our services with you as a client firm or for placement. Feel free to call us or look for us at the Saturday H.A.A.U.G. meetings and we will put our Apple to work for you. **"IPS- the computerized placement professionals."**

Darrell Raithel

Senior Associate

J. Back

Senior Associate

NAME: _____ SALARY: _____

HOME PHONE: _____ OFFICE PHONE: _____

HARDWARE: _____

SYSTEMS: _____

LANGUAGES: _____

APPLICATIONS: _____

INDUSTRIES: _____

POSITIONS HELD: _____

For paid placement evaluation, please use this tear out form or send resume to International Personnel Services, 50 Briar Hollow East, Suite 620, Houston, TX 77027.

Houston Area Apple Users Group
APPLE BARREL
2218 Running Springs
Kingwood, TX 77339

BULK RATE
U.S. POSTAGE
PAID
HOUSTON, TEXAS
PERMIT 3936

Postmasters:

Address Correction Requested
Forwarding and Return Postage Guaranteed



H . A . A . U . G .